



Compact



High performance



Long running time

Silenced generators equipped with Kubota 1500 RPM engine.  
Prepared for automatic starting via a convenient connector on the instrument panel.  
The central lifting hook (on request) allows a practical handling.



## MG 10000 S-KL

Auto engine protection shutdown system with warning lights for:

- battery charger failure
- high water temperature
- low fuel level
- low oil pressure

1 x 32 A - 230 V single-phase socket

1 x 230V single-phase output

Starting battery

Emergency stop button

Hourmeter

Voltmeter

Power outputs protections

Earth Leakage Circuit Breaker (ELCB)

Connector for AMF-ATS panel and/or remote control

Fork-lift pockets

## MG 10 S-KL

Auto engine protection shutdown system with warning lights for:

- battery charger failure
- high water temperature
- low fuel level
- low oil pressure

1 x 16 A - 400 V three-phase socket

1 x 16 A - 230 V single-phase socket

Starting battery

Emergency stop button

Hourmeter

Voltmeter

Power outputs protections



Earth Leakage Circuit Breaker (ELCB)

Connector for AMF-ATS panel and/or remote control

Fork-lift pockets



## DIMENSIONS IN MM

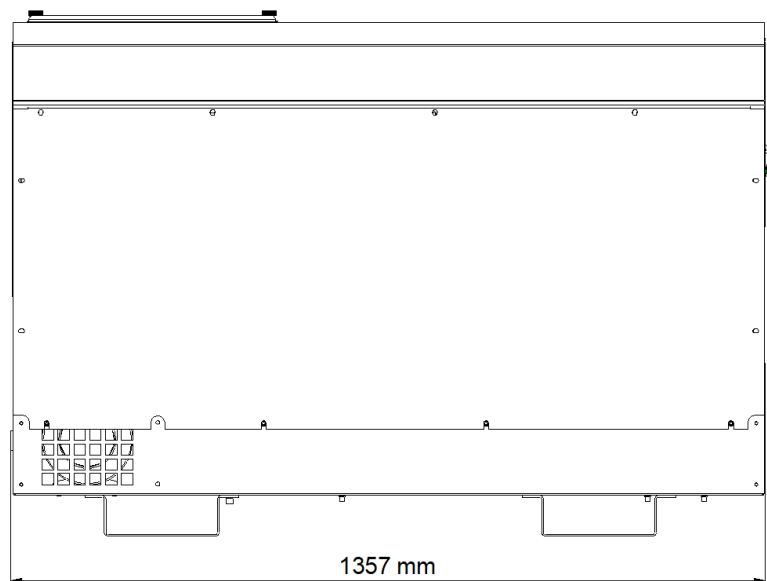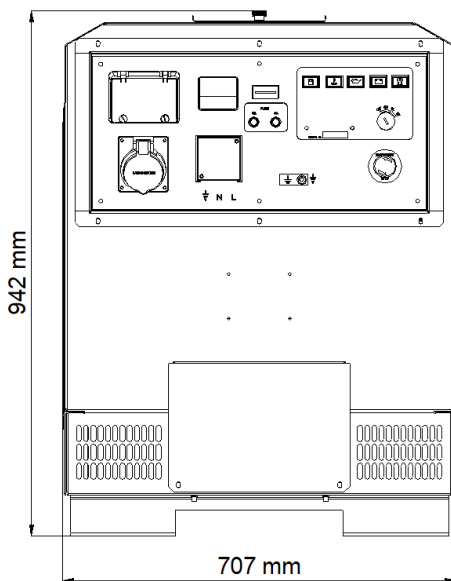

# S-KL SERIES

# TECHNICAL DATA

	MG 10000 S-KL	MG 10 S-KL
Noise level Lwa	95 (70 dB a 7 mt)	
AC generator-50Hz	Synchronous	
Three-phase max. power		10 kVA - 400 V
Single-phase max. power	10 kVA - 230 V	3,3 kVA - 230 V
Power Factor	cos φ 0,8	
Kubota 1500 RPM engine	D 1105	
Fuel	Diesel	
No. cylinders	3	
Power	12,7 hp (9,5 kWm)	
Displacement	1123 cm <sup>3</sup>	
Cooling system	Water	
Starting system	Electric	
Fuel tank capacity	40 lt	
Fuel consumption @75%	2,2 lt/h	
Insulation Class	H	
Ambient temperature	40 °C	
Altitude	1000 mt	
Degree of protection	IP 23	
Dimensions (LxWxH)	1357x707x942 mm	
Dry weight	350 kg	

## S-KL SERIES

Options on request

- Engine heater
- Central lifting hook

Accessories

- AMF-ATS automatic starting panel
- Remote control
- 2 wheels trolley with handles

NOTE

---

---

---

---

---

---