

Compact



High performance

**SUPER
SILENCED**

Soundproof box

Super silenced generators equipped with Kubota 3000 RPM or 1500 RPM engine. Compact and resistant, they are designed for automatic starting via a convenient connector on the instrument panel.

Equipped with central lifting hook and forkable base for practical handling.



SS-K SERIES

STANDARD EQUIPMENT

MG 10001 SS-K - SSKL

Auto engine protection shutdown system with warning lights for:

- battery charger failure
- high water temperature
- low fuel level
- low oil pressure

Starting battery

Emergency stop button

Hourmeter

1 x 16 A - 230 V Schuko single-phase socket

1 x 16 A - 230 V single-phase socket

1 x 32 A - 230 V single-phase socket

Power output protection

Earth leakage circuit breaker (ELCB)

Connector for AMF-ATS panel and/or remote control

Lifting hook

MG 10/8 SS-K - SSKL

Auto engine protection shutdown system with warning lights for:

- battery charger failure
- high water temperature
- low fuel level
- low oil pressure

Starting battery

Emergency stop button

Voltmeter

Hourmeter

Reinforced single-phase output power selector

1 x 16 A - 230 V single-phase socket

1 x 32 A - 230 V single-phase socket

1 x 16 A - 400 V three-phase socket

Power output protection

Earth leakage circuit breaker (ELCB)


AVR

Connector for AMF-ATS panel and/or remote control

Lifting hook



DIMENSIONS IN MM

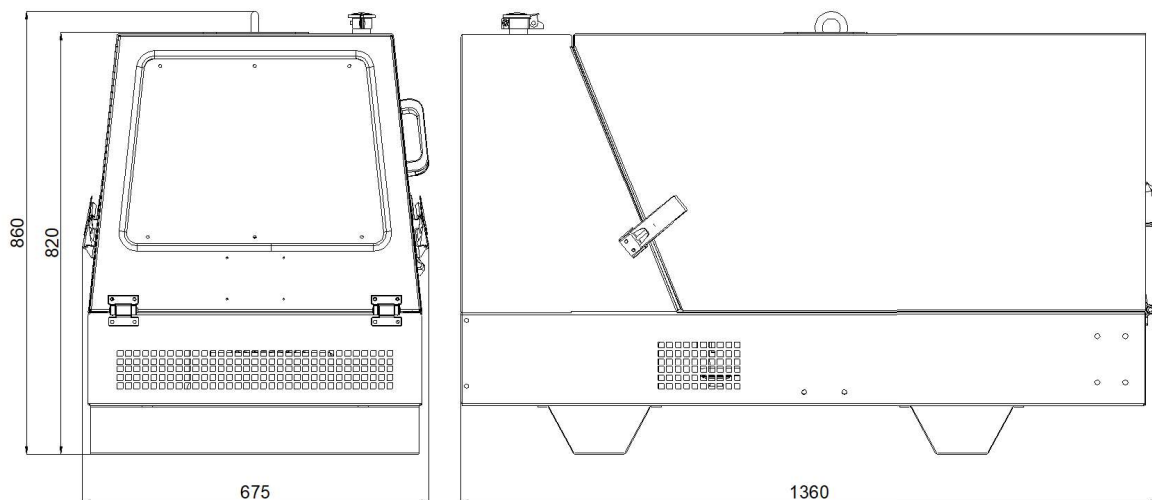

SS-K SERIES

TECHNICAL DATA

	MG 10001 SS-K	MG 10001 SSKL	MG 10/8 SS-K	MG 10/8 SSKL
Noise level Lwa	95 (70 dB a 7 mt)	90 (65 dB a 7 mt)	95 (70 dB a 7 mt)	90 (65 dB a 7 mt)
AC generator-50Hz	Synchronous			
Three-phase max. power	10 kVA - 230 V		10 kVA - 400 V	10 kVA - 400 V
Single-phase max. power	10 kVA - 230 V	10 kVA - 230 V	6,6 kVA - 230 V	6,6 kVA - 230 V
Power Factor	cos φ 0,8			
Kubota engine	D 722 3000 RPM	D 1105 1500 RPM	D722 3000 RPM	D 1105 1500 RPM
Fuel	Diesel			
No. cylinders	3			
Power	17 HP (12,5 kWm)	12,7 HP (9,5 kWm)	17 HP (12,5 kWm)	12,7 HP (9,5 kWm)
Displacement	719 cm3	1123 cm3	719 cm3	1123 cm3
Cooling system	Water			
Starting system	Electric			
Fuel tank capacity	30 lt			
Fuel consumption @75%	3,3 lt/h	2 lt/h	3,3 lt/h	2 lt/h
Insulation Class	H			
Ambient temperature	40 °C			
Altitude	1000 mt			
Degree of protection	IP 23			
Dimensions (LxWxH)	1360x675x860 mm			
Dry weight	300 kg	330 kg	295 kg	350 kg

SS-K SERIES

Options on request

- 1- Engine heater
- Spark arrester muffler

Accessories

- 2- AMF-ATS automatic starting panel
- 3- Remote control
- 2 wheels trolley with handles



NOTE
