

Compact



High performance

**SUPER
SILENCED**

Soundproof box

Super silenced generator equipped with Yanmar 3000 RPM engine.
Designed for automatic starting via a convenient connector on the instrument panel.
Equipped with central lifting hook and forkable base, trolley available for practical handling.



Stage V






MG 6001 SS-Y

Auto engine protection shutdown system with warning lights for:

- battery charger failure
 - low fuel level
 - low oil pressure
- 1 x 32 A - 230 V single-phase socket
1 x 16 A - 230 V single-phase socket

- Starting battery
- Emergency stop button
- Hourmeter
- Power outputs protections
- Earth Leakage Circuit Breaker (ELCB)
- Connector for AMF-ATS panel and/or remote control
- Central lifting hook
- Fork-lift pockets

DIMENSIONS IN MM

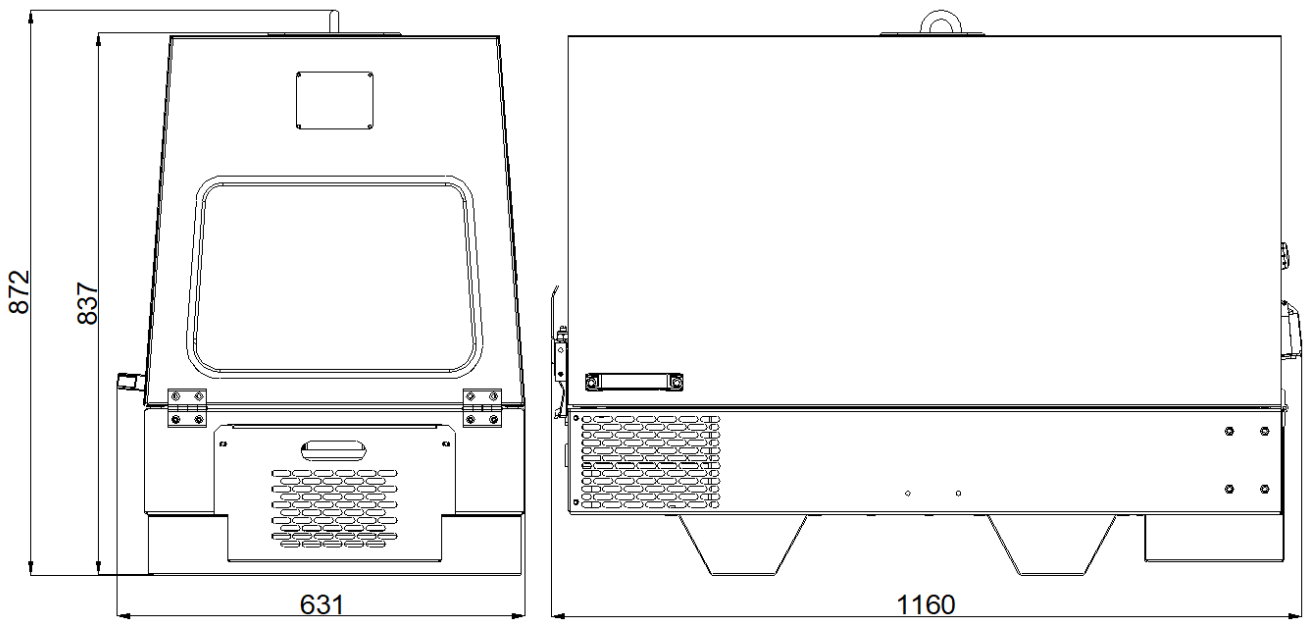

MG 6001 SS-Y	
Noise level Lwa	92 (67 dB a 7 mt)
AC generator-50Hz	Synchronous
Single-phase max. power	6 kVA - 230 V
Power Factor	cos ϕ 0,8
Yanmar 3000 RPM engine	L 100 V
Fuel	Diesel
No. cylinders	1
Power	8,8 HP (6,5 kWm)
Displacement	1123 cm ³
Cooling system	Air
Starting system	Electric
Fuel tank capacity	30 lt
Fuel consumption @75%	2,2 lt/h
Insulation Class	H
Ambient temperature	40 °C
Altitude	1000 mt
Degree of protection	IP 23
Dimensions (LxWxH)	1160x631x872 mm
Dry weight	200 kg

MG 6001 SS-Y

Accessories

- AMF-ATS automatic starting panel
 - Remote control
- 2 wheels trolley with handles

NOTE

