




**SUPER  
SILENCED**

Soundproof box



Easy installation



Compact

Compact, lightweight and silenced vehicular generator, designed for the installation on special vehicles such as Civil Defense rescue vehicles, workshop wagons, motorhomes, trucks and caravans. Equipped with Honda 3000 RPM engine is designed with on board control panel and built-in muffler, 17 litres fuel tank available.




Stage V



# MHS 6200 H/SA

# STANDARD EQUIPMENT

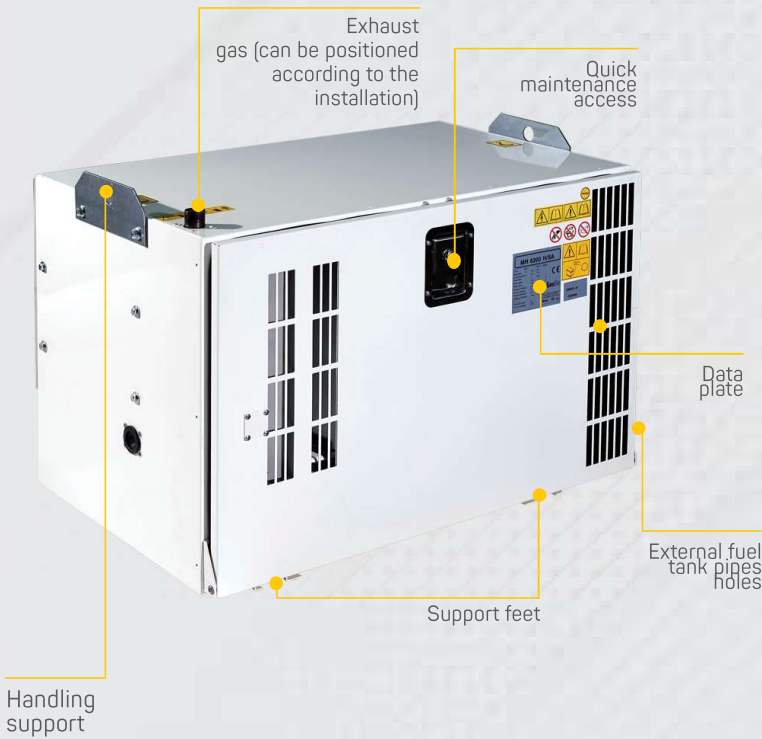

## MHS 6200 H/SA



Remote control panel with:

- Multifunction display showing single-phase generator voltage, battery voltage, frequency, hour meter, RPM
- Start / Stop button

On board:

- Connection cable to remote panel
- Safety shutdown in case of low oil level, high water temperature, engine failure
- Circuit breaker
- General shutdown switch
- Built-in muffler

## DIMENSIONS IN MM

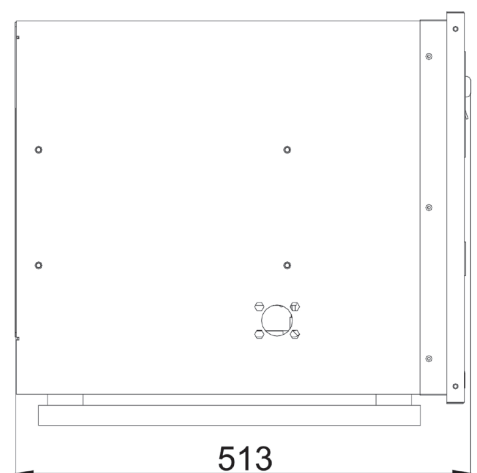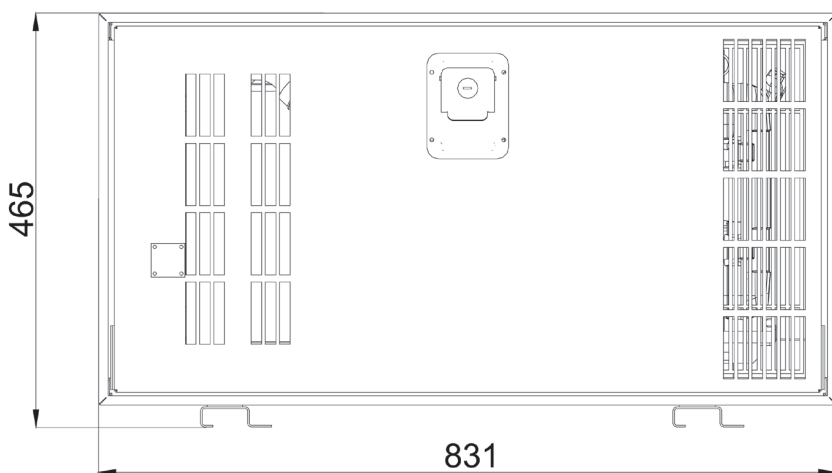

MHS 6200 H/SA	
Noise level Lwa	83 (58 dB a 7 mt)
AC generator-50Hz	Synchronous
Single-phase max. power	6,2 kVA - 230 V
Power Factor	cos $\phi$ 0,8
Honda 3000 RPM engine	GX 390 OHV
Fuel	Petrol
No. cylinders	1
Power	11 HP (8,2 kWm)
Displacement	390 cm <sup>3</sup>
Cooling system	Air
Starting system	Electric
Fuel tank capacity	17 lt (optional)
Fuel consumption @75%	3,3 lt/h
Insulation Class	H
Ambient temperature	40 °C
Altitude	1000 mt
Degree of protection	IP 23
Dimensions (LxWxH)	831x513x465 mm
Dry weight	140 kg



## MHS 6200 H/SA

Options on request

- 20 lt plastic fuel tank with brackets
- 20 lt steel fuel tank with brackets
  - Low fuel indicator kit
  - Fuel filler with key lock cap
- 1 mt tank connection pipe with fuel filler

## NOTE

---

---

---

---

---

---

